



TECHNICAL SHEET

PROFILING MINI-PROF-LIGHT

KNS-SCHLEBACH MPL

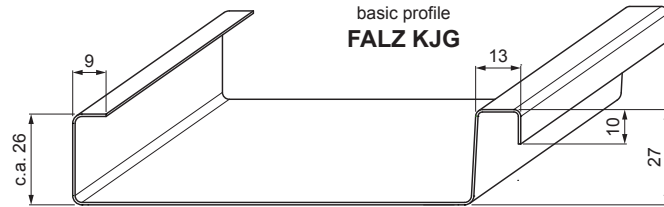

PROFILING OPTIONS:

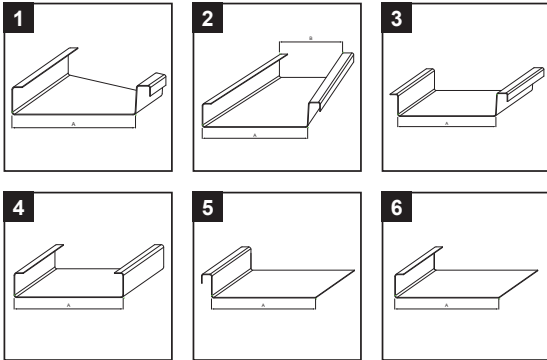




DESCRIPTION:

Compact, lightweight and demountable machine suitable for hard-to-reach construction sites or small workshops for production of double standing groove profiles 25 from blanks or cut lengths in one passe.

Parameters of the processed sheet metal	
Thickness	TiZn – do 0,80 mm Cu – do 0,80 mm Al – do 0,80 mm Pzn – do 0,65 mm Stainless steel – do 0,50 mm
Min./max. coil width	250/730 mm
Min. production length	500 mm



Parameters and properties of the profiling machine	
Machine length	1200 mm
Machine width	1290 mm
Machine height	460 mm
Height of the input sheet	286 mm
Distance between axes	180–660 mm
Profiling speed	8,0 m/min
Machine drive	230 V, 50 Hz, 1-phase
Powe input	2 x 0,55 kW
Weight	155 kg

INDEX CHANGE	DATE	SIGNATURE	W.C.	WEIGHT kg	SCALE	 
SIZE, SEMI-FINISHED PRODUCTS				NOTE	POSITION NUMBER	
AUXILIARY EQUIPMENT				TECHNOLOGIST	DRAWING NUMBER	
ELABORATED BY Ing. Kluska M.				OLD DRAWING	DRAWING NUMBER	
TESTED BY				NAME		
				Profiling MINI-PROF-LIGHT		
				KNS-SCHLEBACH MPL		
				Number of sheets		Sheet 

Created: 05.06.2026 18:19:40

Technical changes reserved