
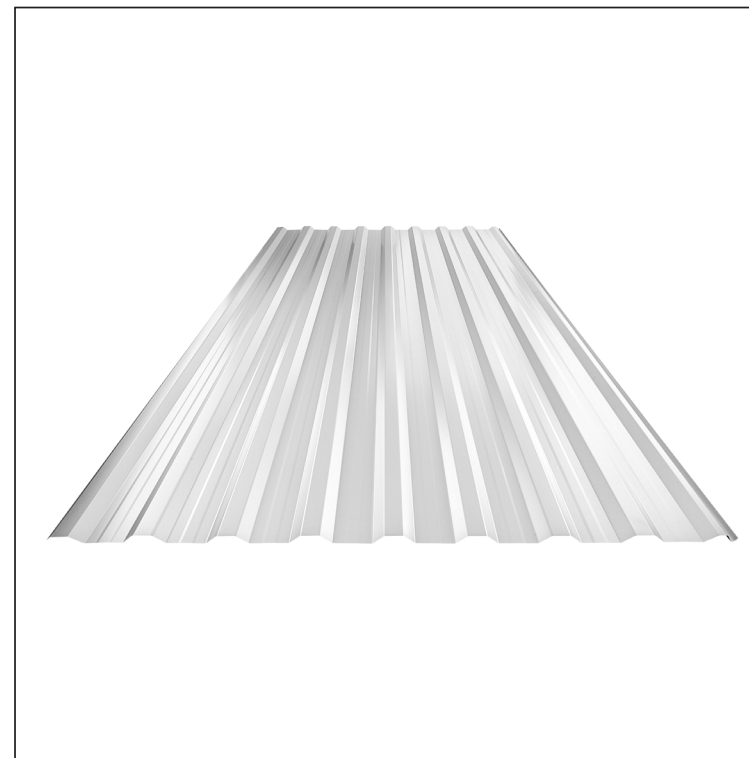
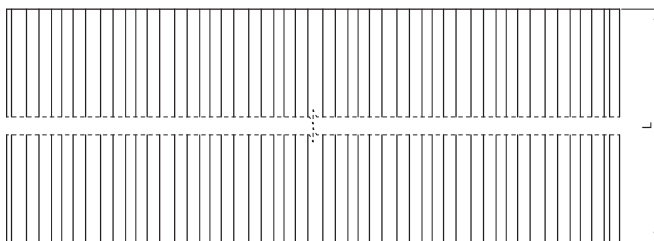


TEHNIČNI LIST

# STREŠNI TRAPEZ Z ODTISOM TR 18A+ STANDARD

# TR-18A+ ST

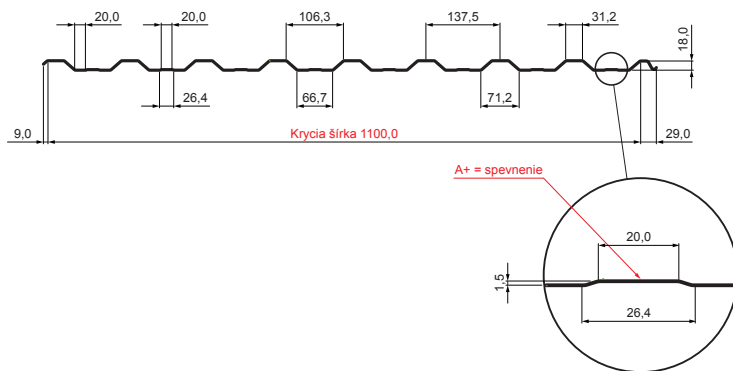

Tehniční parametry [mm]	
Pokrivna šírina	1100,0
Skupna šírina	1138,0
Debelina pločevine	0,50
Višina profila	18,0
Dolžina trapeza (L)	2000,0 / 3000,0 / 4000,0 / 5000,0 / 6000,0

**USS** Pocinkano – U. S. Steel

INDEKS SPREMEMBA	DATUM	PODPIS	<b>KJG</b> QUALITY®	<b>TR18</b>	Scan code for 3D model	
OZN. MAT.	R.O.		MASA kg	MER.		
DIM.-POLIZD.						
POM. OPR.			STN	RAZVRS.ŠT.		
SEST.	Ing. Kluska M.		OP.	ŠT.POZICIE		
PREIZK.						
TEHNOL.	TEHNOL.		STARA SK.	ŠT.SK.		
NAZIV			Str.			
Strešni trapez z odtisom TR 18A+ standard			TR-18A+ ST			
			Št. strani	Str.		

Dimenzije [mm]			
Debelina	Dolžina (L) mm	Pokrivna površina m²/kom	Skupna površina m²/kom
0,50	2000,0	2,20	2,276
0,50	3000,0	3,30	3,414
0,50	4000,0	4,40	4,552
0,50	5000,0	5,50	5,690
0,50	6000,0	6,60	6,828

Kreirano: 06.06.2026 06:29:48

Tehnične spremembe pridržane