


MINIMUM SLOPE OF THE ROOF	od 3°	8°	10°	od 12°	14°	15°	16°	17°	22°	25°
KJG UNI1			●							
KJG UNI2			●							
KJG TR 18 roof-type < 7 m rafter length without cross joints		●								
KJG TR 18 roof-type 7 – 12 m rafter length						●				
KJG TR 35 roof-type < 7 m rafter length without cross joints		●								
KJG TR 35 roof-type 7 – 12 m rafter length						●				
KJG folded template 28x28									●	
KJG folded template 35x35 < 7 m rafter length				●						
KJG folded template 35x35 7 – 12 m rafter length					●					
KJG folded template 35x35 >12 m rafter length							●			
KJG CLICK 25 < 7 m rafter length		●								
KJG CLICK 25 7 – 12 m rafter length						●				
KJG FALZ using a gasket in the groove	●									

* Consider the limits according to STN-EN Standard

100 % 45° = 100 %

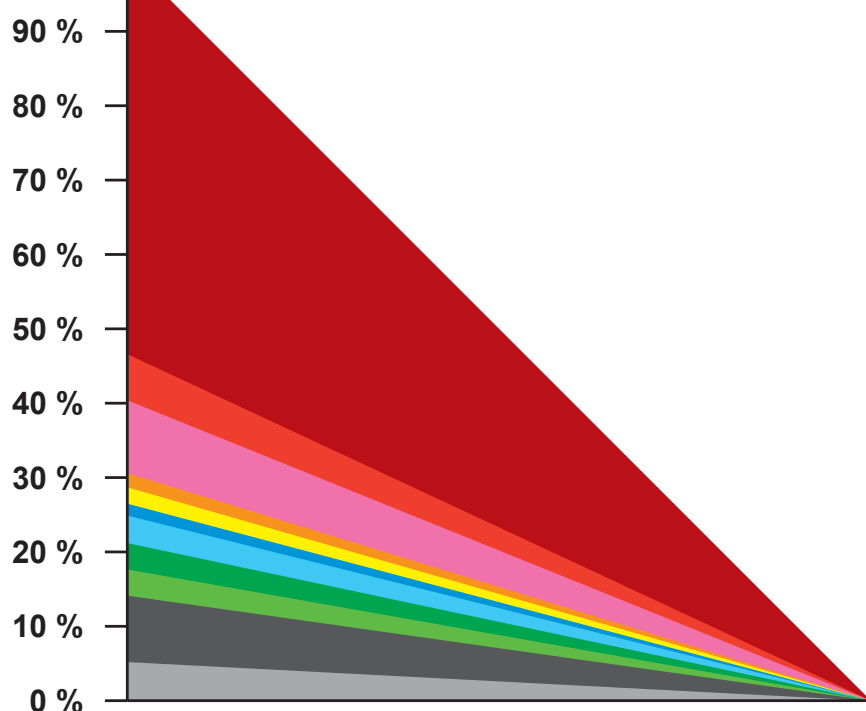

●	45° = 100,0%
●	25° = 46,6%
●	22° = 40,4%
●	17° = 30,6%
●	16° = 28,7%
●	15° = 26,49%
●	14° = 24,9%
●	12° = 21,2%
●	10° = 17,66%
●	8° = 14,13%
●	3° = 5,2%